




## CRYOGENIC TANK SERVICES (CTS)

### Air Filter Skid

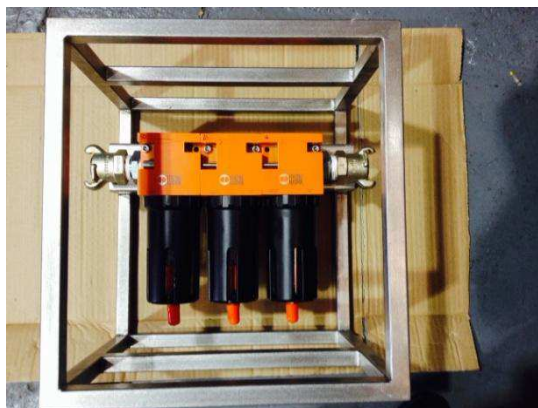

Side view



Top view

The Portable Air Filter Skid is used in humid conditions to assist with the smooth running of air-driven pumps. Situated in between airline and air driven pumps, connected via crowsfeet airline connections, the filter extracts moisture from the air supply while in operation.

### Features

- Three air filters, connected together
- Three filter element specifications: 50 microns, 20 microns, 4 microns
- Top-mounted carry handle for easy portability
- Crowsfeet connections
- Low cost replaceable filter elements
- Connect-in and ready to use
- Robust construction

### Typical Overall Dimensions / Weight

- 30cms x 36cms x 38cms
- 9.5kg

### Customs Code: 9032 8100