




CRYOGENIC TANK SERVICES (CTS) DATA SHEET

10,000psi OVER PRESSURISATION SKID

Air operated, 10,000psi range Over Pressurisation Skid designed to be installed in-line during pumping / pressurisation operations to provide protection against accidental over-pressurisation of system.

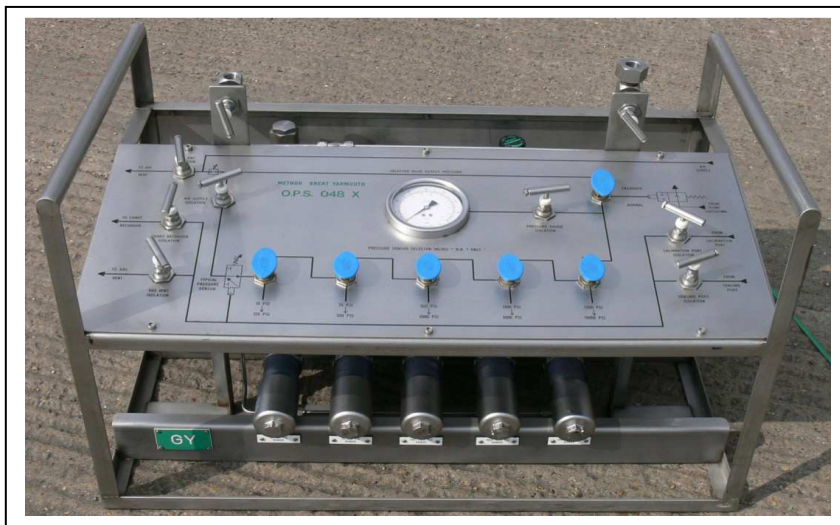

Features:

- Manual adjustable range, unit can be set from 10psi to 10,000psi.
- Once set skid will automatically sense any over pressurisation of the system and will shut down the pump whilst safely venting excess pressure.
- Comes with complete set up instructions.
- Well proven and trouble free operation.
- Internal relief valve to protect skid.
- Designed with the maintenance engineer in mind.
- Low cost servicing.
- Robust construction.

Overall Dimensions:

34" x 20" x 28 " high (870mm x 510mm x 700mm high)

Approximate Weight:

178 lb (81 Kg)

Standard Equipment:

- Air filter regulator c/w pressure gauge.
- Set of adjustable pressure sensors
- All interconnecting pipework and fittings
- Stainless steel framework with fork lift pockets
- Lifting Handles